


Fast Axis Collimator

FAC3000 (BFL=2 mm)

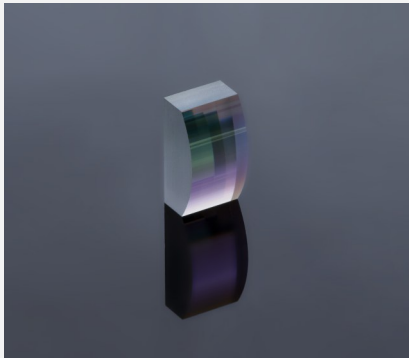

Features and Advantages

Aspherical cylindrical lens for the collimation of the fast axis of diode lasers.
Optimized for nano-stack emitters and LiDAR applications.

Product Specifications

Specification Data	Unit	Value
Material		S-TIH53 (Ohara)
Width (W)	mm	3.20 ± 0.05
Thickness (T)	mm	1.818 ± 0.02
Refractive index n @ 905 nm		1.817
Effective focal length (EFL) @ 905 nm	mm	3.0
Back focal length (BFL) @ 905 nm	mm	2.0
Numerical aperture (NA)		0.6
Transmission	%	> 99
Power within an angle of ± 0.22 mrad for 1 μm height emitter ⁽¹⁾	%	> 90
Power within an angle of ± 2.2 mrad for 10 μm height nano-stack ⁽¹⁾	%	> 90


Product Code **ZLE002318**

Specification Data ⁽²⁾	Unit	Value
Length (L)	mm	2.1 ± 0.05
Optimized for		4-channel nano-stack
Clear aperture	mm ²	1.8 x 2.9
AR-Coating	nm	885 - 955
Surface imperfections (DIN ISO 10110-7)		5/5x0.063; C3x0.1; L4x0.025; E0.1

⁽¹⁾ Valid for no smile of the laser diode.

⁽²⁾ Customized design, dimensions, coatings & mounted glass tabs on request.

Product Drawing (mm)

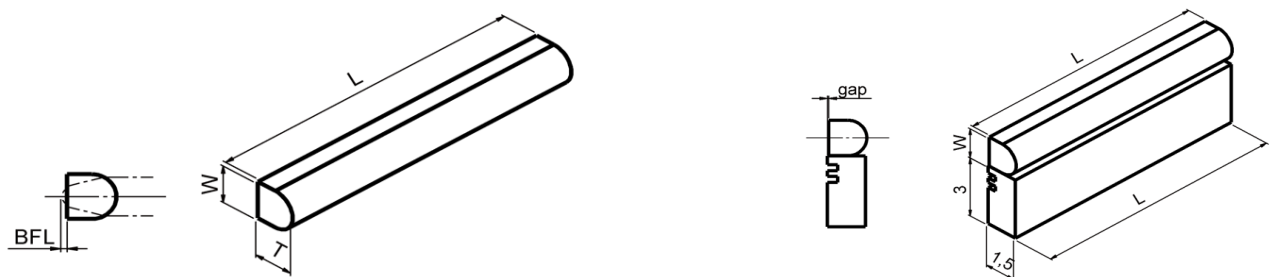

Rev 04 | Updated September 22, 2026 | RoHS compliant 2011/65/EU and 2015/863/EU

1

All rights reserved. Product specifications and descriptions are subject to change. All our products are patent pending. Please contact our sales representatives for complete details.

LIMO GmbH

Focuslight (DG) Microoptics Co. Ltd.

Address: Bookenburgweg 4-8, 44319 Dortmund, Germany

Address: No. 49, Jingyi Road, Dongcheng Street, Dongguan City, Guangdong Province, China

Tel: +49 231 22 24 1-0 (DE) +86 29 8956 0050 (CN) | Email: sales@focuslight.com | Website: <https://www.focuslight.com>